

# HSE

## NOTES:

Rated Current: 1.0AMP  
Contact Resistance: 30mΩ max  
Withstand Voltage: 500V AC/DC  
Insulation Resistance: 1000MΩ min  
Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze  
Contact Plating: Au Over Ni  
Insulator Material: PBT+30%G.F UL94V-0


## Ordering Information

### 5226 - XX YP XX B W 01

Two Parts  
Conn+Cover 10P-50P

Contact Plating  
G0=Gold Flash  
G3=10u"Gold  
G4=15u"Gold  
G5=30u"Gold  
S0=Gold Flash/Ni  
S3=10u"Gold/Ni  
S4=15u"Gold/Ni  
S5=30u"Gold/Ni

Color Insulator  
B=Black  
G=Grey(427C)

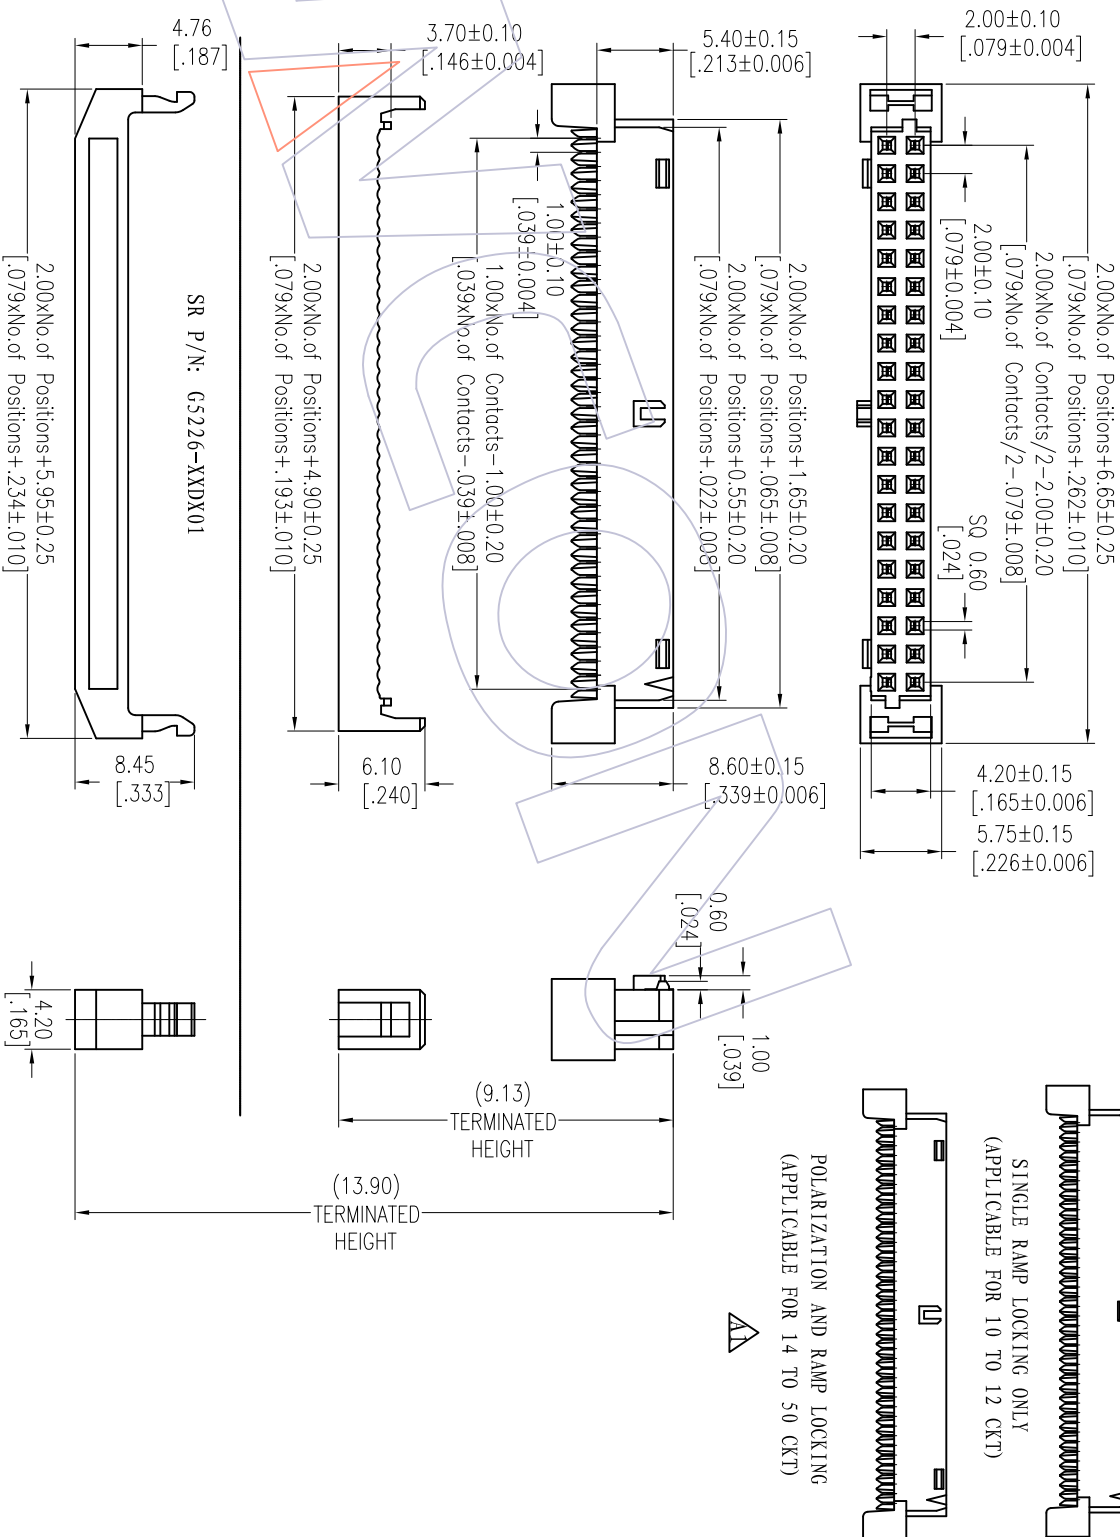

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshan
A1	2012/07/28	MODIFY		XX	±0.40	2012/07/28	mm	A4	5226-XXYPXXBW01	2.00mm IDC SOCKET "M" TYPE (WITH RAMP LOCKING)	Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com	Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com
A0	2010/09/28	NEW		XXX	±0.25		inch	A4				
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	± 3'	DATE	SHEET	1/1	Customer NO.			