

HSF

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

NOTES:

Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C


Contact Material: Phosphor Bronze
 Contact plating: Au over Ni
 Insulator Material: PA9T+30%GF UL94V-0

Ordering Information

2320T - 2 XX M XX CUNT X

No. of Pins per ROW: 02-50PIN
 Contact Plating: G=Gold Finish
 G3=10μ Gold
 G4=5μ Gold
 G5=30μ Gold
 Packing: T=Tube
 R=Trays&Reel+CAP
 P=Tube+CAP
 Series No. 1=TYPE 1
 2=TYPE 2

| Item | Pitch | Mating |
|-----------|-------|----------------|
| Standard | 1.27 | 1310/1315/1320 |
| Alternate | | |

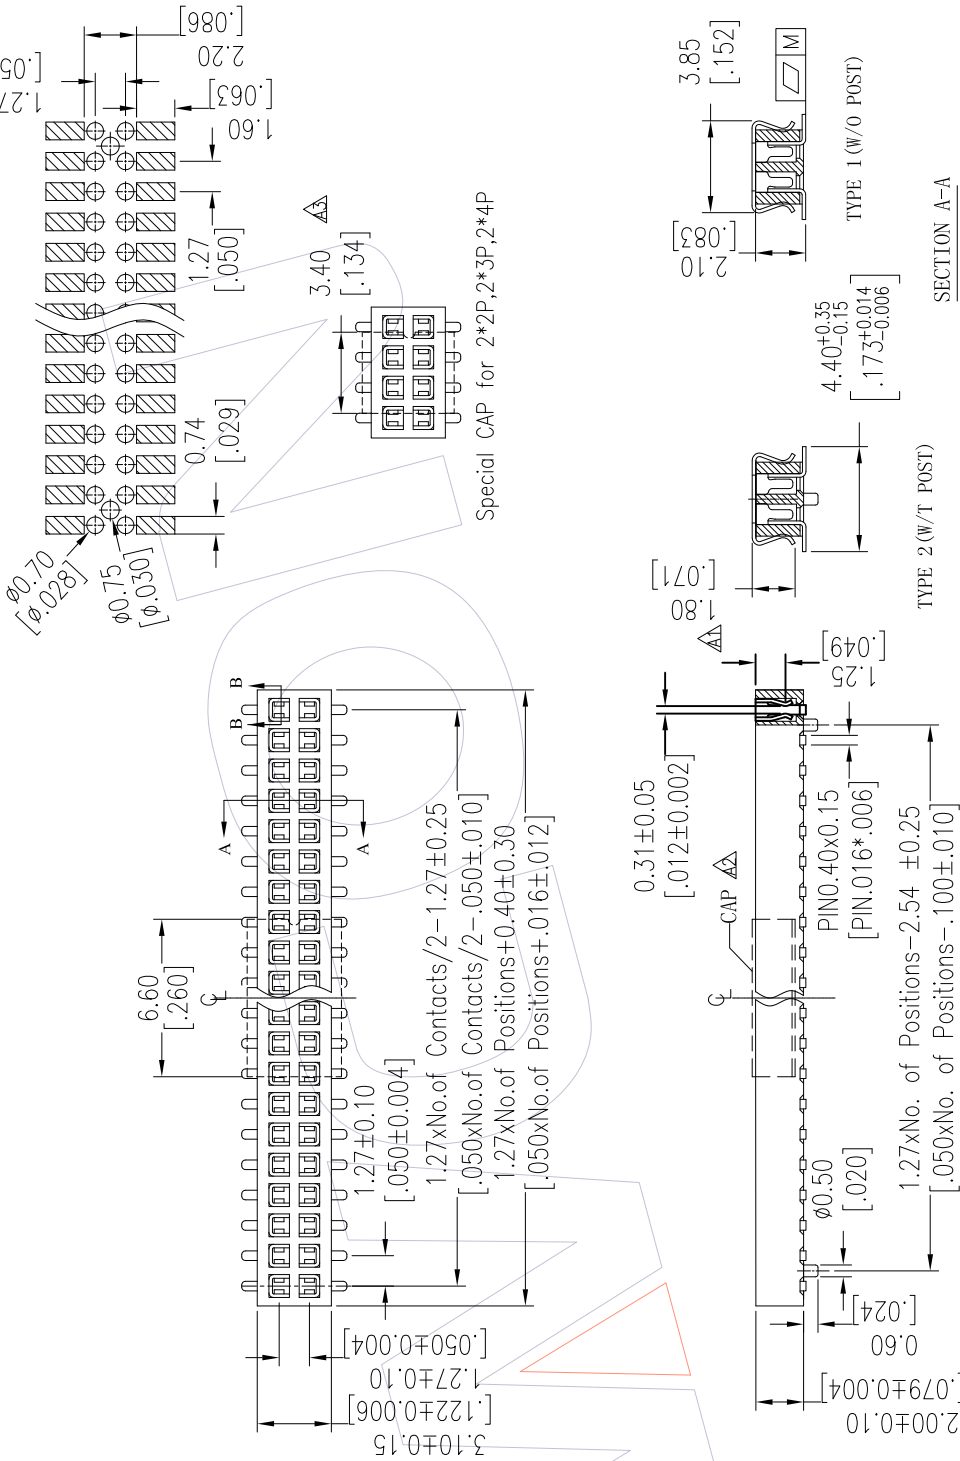

SECTION B-B

| | |
|--------|--------|
| 1~9P | M=0.10 |
| 10~19P | M=0.15 |
| 20P以上 | M=0.25 |

SECTION A-A

| | |
|--------|-------------------|
| TYPE | PART NO. |
| TYPE 1 | 2320T-2XXMXXCUNX1 |
| TYPE 2 | 2320T-2XXMXXCUNX2 |

WCON

Http: www.wcon.com

WCON-Dongguan
 WCON-Kunshan
 Tel: +86 769 85358920
 Tel: +86 512 57468408
 Fax: +86 769 85358915
 Fax: +86 512 57468468
 E-mail: sales@wcon.com
 E-mail: sales@wcon.com

PART NO. SEE TABLE
 TITLE: FHI.27mm Dual Bottom Enter SMT
 IH=2.0
 Customer NO.

| | | | | | |
|-------------|---------|------------|-------|-----|-----------|
| OPERATION | DRAW | DATE | SCALE | FIT | PART NO. |
| x.xx ±0.40 | Wang | 2016/05/30 | UNIT | mm | SEE TABLE |
| x.xx ±0.25 | CHECK | DATE | SIZE | A4 | |
| x.xxx ±0.15 | APPROVE | DATE | SHEET | 1/1 | |
| Angle ± 3' | DIM | TOL | PROJ. | | |

| REV | DATE | DESCRIPTION | CHANGE |
|-----|------------|------------------------|--------|
| A3 | 2016/05/30 | Modify CAP 3.00 → 3.40 | |
| A2 | 2014/12/30 | Modify CAP | |
| A1 | 2013/08/20 | Modify CAP 2.00 → 1.80 | |
| A0 | 2012/07/05 | NEW | |