


HSF

NOTES:
 Voltage Rating: 50V AC/DC
 Current Rating: 0.5AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/Minute
 Insulation Resistance: 500MΩ min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze
 Contact Plating: Sn OR Au OVER Nickel
 Insulator Material: PA9T+33%GF UL94V-O BLACK

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ±0.05)



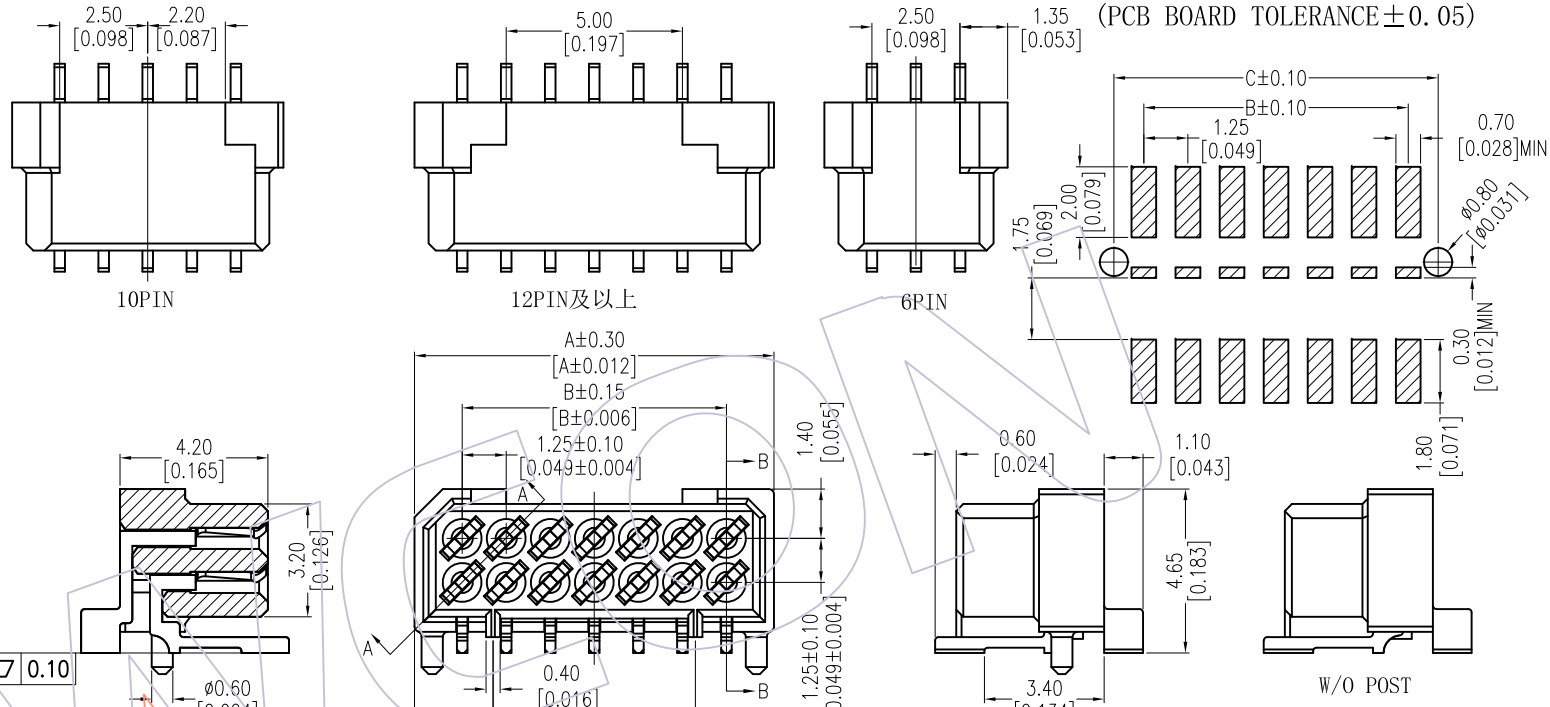


Ordering Information

3651-S XXX - 042 XX R0X

- No. of Pins
 006: 06 Pin
 010: 10 Pin
 012: 12 Pin
 014: 14 Pin
 016: 16 Pin
 018: 18 Pin
 020: 20 Pin
 022: 22 Pin
 024: 24 Pin
- Plating
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 SN=Tin
- Packing
 R=Tape&Reel

0.10

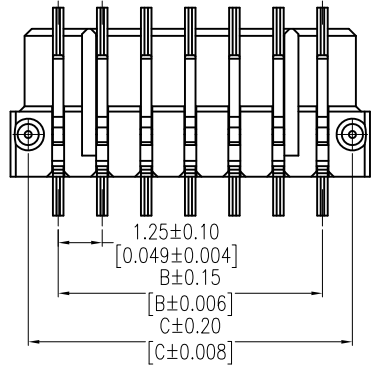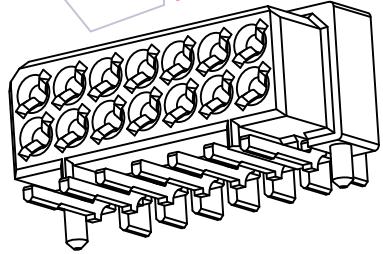

3651-SXXX-042XXR02	W/O POST
3651-SXXX-042XXR01	W/T POST

11.99	15.45	13.75	16.45	24
10.74	14.20	12.50	15.20	22
9.49	12.95	11.25	13.95	20
8.24	11.70	10.00	12.70	18
6.99	10.45	8.75	11.45	16
5.74	9.20	7.50	10.20	14
4.49	7.95	6.25	8.95	12
3.24	6.70	5.00	7.70	10
0.74	4.20	2.50	5.20	6
D	C	B	A	Pos.

		OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
		X.X	±0.40	DingWenMin		2016. 10. 20		UNIT	mm			3651-SXXX-042SNR0X	
		X.XX	±0.25	CHECK		DATE		SIZE	A4	TITLE:		1. 25mm BTB FEMALE, 90° SMT TYPE	
		X.XXX	±0.15	APPROVE		DATE		SHEET	1/1	Customer NO.			
AO	2016. 10. 20	NEW		---				PROJ.					
REV	DATE	MODIFICATION DESCRIPTION		CHANGE									

WCON
 Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com