

# HSF

**NOTES:**

- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: LCP+30%G.F UL94V-0






## Ordering Information


2263 - 1 XX R XX DYN T 1

- No. of Pins per ROW: 02-40PIN
- Contact Plating: GM=Gold Flash, D=LCP
- Insulator: T=Tube
- Packing: T=Tube
- G3=10μr/Gold
- G4=15μr/Gold
- G5=30μr/Gold
- S0=Gold Flash/Tin
- S3=10μr/Gold/Tin
- S4=15μr/Gold/Tin
- S5=30μr/Gold/Tin
- SN=Tin
- SWM=Mate Tin

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

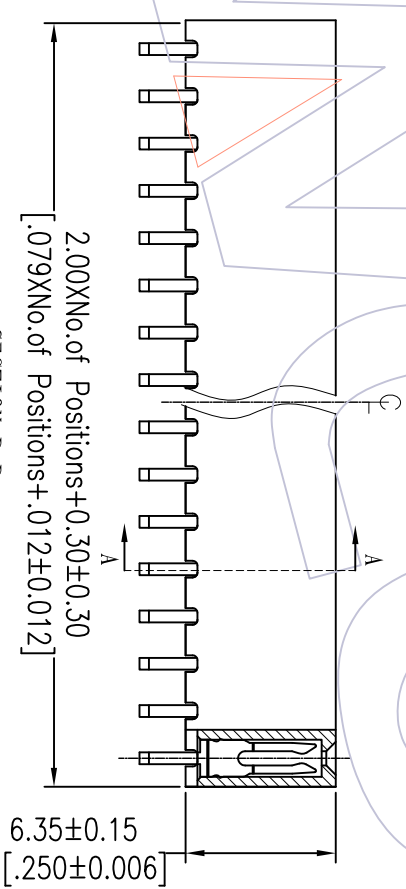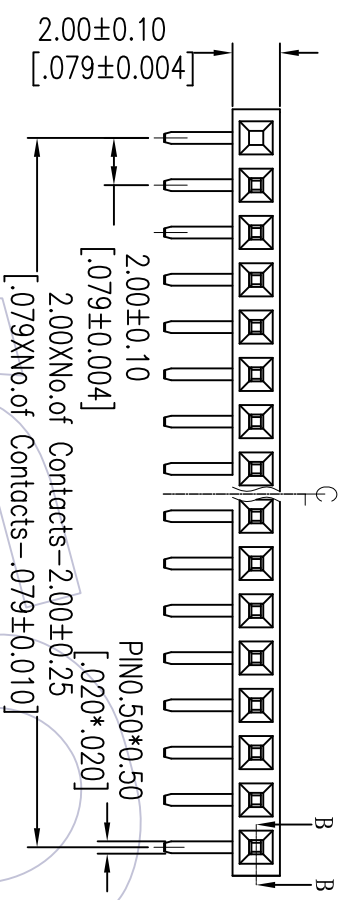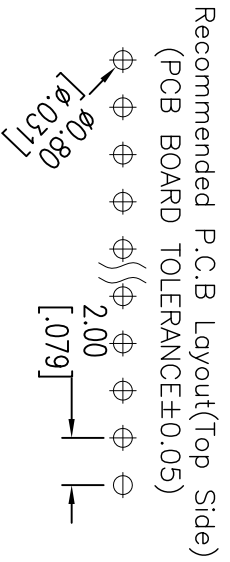

SECTION B-B

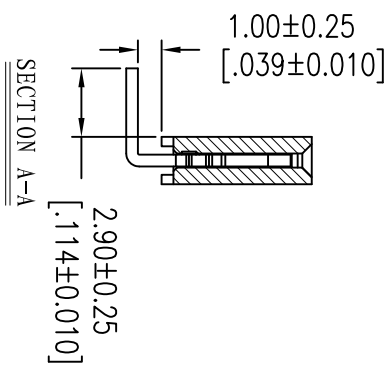

SECTION A-A

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2013/03/15	Modify drawing	---	X.XX	Wang	2013/03/15	mm	A4	2263-1XXRXXDYN T1
A0	2012/12/7	NEW	---	X.XXX	CHECK	DATE	SIZE	A4	TITLE: FH2.0mm SINGLE ROW 90° SMT H=6.35
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	1/1	Customer NO.
				DM	TOL		PROJ.		

# WCON

WCON-Dongguan  
 Tel: +86 769 85358920  
 Fax: +86 769 85358915  
 E-mail: sales@wcon.com

WCON-Kunshan  
 Tel: +86 512 57468408  
 Fax: +86 512 57468468  
 E-mail: sales@wcon.com

Http: www.wcon.com